

BY-LAW NO. 2024-0021

A By-law to amend Zoning By-law 2010-0050, as amended, Part of Lot 19, Concession 9 (Esquesing) and Part of Lot 17, Registered Plan 341

Town of Halton Hills, Regional Municipality of Halton, municipally known as 12, 22 & 24 Dayfoot Drive (Georgetown)

WHEREAS Council is empowered to enact this By-law by virtue of the provisions of Section 34 of the Planning Act, R.S.O.1990, as amended;

AND WHEREAS on March 25, 2024, Council for the Town of Halton Hills approved Report No. PD-2024-017, dated February 9, 2024, in which certain recommendations were made relating to amending Zoning By-law 2010-0050;

AND WHEREAS Council has recommended that Zoning By-law 2010-0050 be amended as hereinafter set out;

AND WHEREAS said recommendation conforms to the Official Plan for the Town of Halton Hills, as amended by Official Plan Amendment No. 56.

NOW, THEREFORE, BE IT RESOLVED THAT THE COUNCIL OF THE CORPORATION OF THE TOWN OF HALTON HILLS ENACTS AS FOLLOWS:

1. That Schedule "A3-1" of Zoning By-law 2010-0050, as amended, is hereby further amended by rezoning the lands described as Part of Lot 19, Concession 9 (Esquesing) and Part of Lot 17, Registered Plan 341, municipally known as 12, 22 & 24 Dayfoot Drive (Georgetown);

From a Low Density Residential One (LDR1-2) Zone;

To a High Density Residential Exception 117 (HDR)(117)(H30) Zone.

and;

From a Low Density Residential One – Mature Neighbourhood (LDR1-2)(MN) Zone

To a Holding High Density Residential Exception 117 (HDR)(117)(H30) Zone.


as shown on Schedule "1" attached to and forming part of this By-law:

- That Table 13.1: Exceptions of Zoning By-law 2010-0050 is hereby amended by adding the Exception Provision contained in Schedule "2" attached to and forming part of this By-law.
- 3. That Table 14.1: Holding Zones is hereby further amended by adding the Holding Provision contained in Schedule "4" attached to and forming part of this By-law.

BY-LAW read and passed by the Council for the Town of Halton Hills this 25th day of March, 2024.

MAYOR	- ANN LAWLOR	
TOWN C	LERK – VALERIE	PETRYNIAK

Schedule 1 to By-law 2024-0021

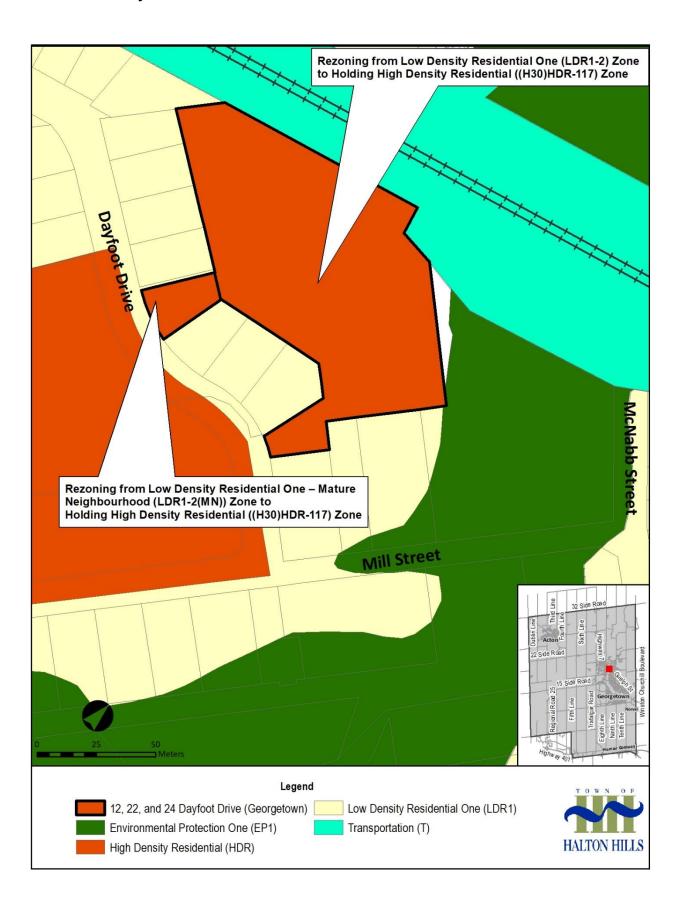


Schedule 2 to By-law 2024-0021

13.1 EXCEPTIONS

1	2	3	4	5	6	7
Exception Number	Zone	Municipal Address	Additional Permitted Uses	Only Permitted Uses	Uses Prohibited	Special Provisions
117	HDR	12, 22 & 24 Dayfoot Drive (Georgetown) Part of Lot 19, Concession 9 (Esquesing) and Part of Lot 17, Registered Plan 341				 (i) Maximum number of Apartment Dwelling Units – 163; (ii) Maximum number of storeys - 6; (iii) Minimum required parking spaces for residents – 1.4 spaces per dwelling unit;
						(iv) Minimum required visitor parking spaces – 0.24 spaces per dwelling unit;
						(v) Minimum requiredbicycle parking spaces– 0.36 spaces perdwelling unit;
						(vi) Maximum height – as shown on Schedule 3 to this By-law;
						(vii) Minimum required yard setbacks – as shown on Schedule 3 to this By- law;
						(viii) Minimum setback from a building or structure containing a dwelling unit to a railway right-of- way – as shown on Schedule 3 to this By- law;
						(ix) An accessory waste storage area may be located outside of the main building;
						(x) The height (in addition to the elements listed in Section 4.9) and setback requirements of this By-law shall not apply to:
						a. any mechanical features, including structures containing a mechanical
						penthouse or the equipment necessary to control an elevator, stairs, stair enclosures,
						elevators and elevator lobbies/vestibules for the purposes of accessing the
						rooftop, provided that such features do not project more than 5.5 metres
						above the highest point of the roof and does not occupy greater than 50% of

the area of the roof; b. window washing equipment, antennae, lighting rods, and satellite dishes, which may project above the highest point of the roof to a maximum of 5.0 metres; c. Parapots, railings, planters, balustrades, bollards, stairs, safety or guard railings, chimneys, retaining walls, wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Omamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/intigation measures, chimneys or flues, access roof hatches, trelliese, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the tord to the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, p. e. Elements of the roof to a maximum of 3.0 metres; and, o. Elements of the roof to a maximum of 3.0 metres; and, o. Elements of the roof to a maximum of 3.0 metres; and, o. e. Elements of the roof to a maximum of 3.0 metres; and, o. e. Elements of the roof to a maximum of 3.0 metres; and, o. e. Elements of the roof to a maximum of 4.0 metres.		1	T	1	T		
equipment, antennae, lighting rods, and satellite dishes, which may project above the highest point of the highest point of 5.0 metres; c. Parapets, raillings, planters, bollards, stalis, safety or guard railings, chimneys, retaining walls, wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ormamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and elements or dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, themal insulation, roof ballast, and skylights may project above the highest point of the proof to a maximum							
antennae, lighting rods, and satellite dishes, which may project above the highest point of the roof to a maximum of 5.0 metres; c. Parapets, railings, planters, ballustrades, bollards, stairs, safety or guard railings, chinneys, retaining walls, wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Omamental or architectural elements, intake/exhaust ventos or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellines, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to fenchnology, thermal insulation, roof ballalst, and skytights may project above the highest point of the roof to a maximum of sallast, and skytights may project above the highest point of the roof to a maximum of sallast, and skytights may project above the highest point of the roof to a maximum of sallast, and skytights may project above the highest point of the roof to a maximum						b.	
rods, and satellite dishes, which may project above the highest point of the roof to a maximum of 5.0 metres; c. Parapets, railings, planters, ballustrades, bollards, stairs, safety or guard railings, chimneys, retaining walls, wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Omamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the project above the hi							
dishes, which may project above the highest point of the roof to a maximum of 5.0 metres: c. Parapets, railings, planters, balustrades, bollards, stalins, safety or guard railings, chimneys, retaining walls, wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres. d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, chimneys or flues, access roof hatches, trellies, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and e. Elements of the roof or a maximum of 3.0 metres; and e. Elements of the roof or a maximum of 3.0 metres; and e. Elements of the roof to a maximum of 3.0 metres; and e. Elements of the roof to a leading the roof to a leading the roof to a lallast, and skylights may project above the highest point of the roof to a maximum or summum or of the maximum project above the highest point of the roof to a maximum or summum or project above the highest point of the roof to a maximum or summum or project above the highest point of the roof to a maximum or summum or project above the highest point of the roof to a maximum or summum or of the maximum or of the project above the highest point of the roof to a maximum or of the project above the highest point of the roof to a maximum or of the project above the highest point of the roof to a maximum or of the project above the highest point of the roof to a maximum or of the project above the highest point of the roof to a maximum or of the project above the highest point of the roof to a maximum or of the project above the highest point of the roof to a maximum or of t							
project above the highest point of the roof to a maximum of 5.0 metres; c. Parapets, railings, planters, ballustrades, bollards, stairs, safety or guard railings, chimneys, retaining walls, wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Omamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and							
highest point of the roof to a maximum of 5.0 metres; c. Parapets, railings, planters, balustrades, bollards, stairs, safety or guard railings, chimneys, retaining walls, wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballats, and skylights may project above the highest point of the roof to a maximum project above the highest point of the project above the highest point project above the highest point							
roof to a maximum of 5.0 metres; c. Parapets, railings, planters, bollards, stairs, bollards, stairs, safety or guard railings, chimneys, retaining walls, wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Omamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furmiture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof green roof green roof preent green green roof the soulding or structure used for green roof green roof green roof project above the highest point of the roof to a maximum of solon metres; and, e. Elements of the roof to a maximum of solon metres; and the roof to a maximum of solon metres; and the roof to a maximum of solon metres; and the roof to a maximum of solon metres; and the roof to a maximum of solon metres; and the roof to a maximum of solon metres; and the roof to a maximum of solon metres; and the roof to a maximum of solon metres; and the roof to a maximum of solon metres; and the roof to a maximum of solon metres; and the roof to a maximum of solon metres; and the roof to a maximum of solon metres; and the roof to a maximum of solon metres; and the roof to a maximum of solon of the roof to a maximum of solon of the so							
of 5.0 metres; c. Parapets, railings, planters, balustrades, bollards, stairs, safety or guard railings, chimneys, retaining walls, wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Omamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of technology, thermal insulation, roof ballast, and skylights may project above the highest point of the foof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of sulation, roof ballast, and skylights may project above the highest point of the toof to a maximum project above the highest point of the about the proof to a maximum of sulation, roof ballast, and skylights may project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the hig							
c. Parapets, raillings, planters, balustrades, bollards, stairs, safety or guard railings, chimneys, retaining walls, wheelchair ramps, structures and elements related to outdoor patios for outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Omamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabonas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a measure of the point of the collation, roof ballast, and skylights may project above the highest point of the toof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to a maximum of 3.0 metres; and, e. Elements of the							roof to a maximum
planters, balustrades, bollards, stairs, safety or guard railings, chimneys, retaining walls, wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or fitues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the							of 5.0 metres;
planters, balustrades, bollards, stairs, safety or guard railings, chimneys, retaining walls, wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or fitues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the						C.	Parapets, railings,
balustrades, bollards, stairs, safety or guard railings, chimneys, retaining walls, wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of technology, thermal insulation, roof ballast, and skylights may project above the highest point of the highest point of the highest point of the							
bollards, stairs, safety or guard railings, chimneys, retaining walls, wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trelliese, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum of 3.0 kylights may project above the highest point of the roof to a maximum of 3.0 kylights may project above the highest point of the roof to a maximum of 3.0 kylights may project above the highest point of the roof to a maximum of 3.0 kylights may project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum project above the highest point of the roof t							
safety or guard railings, chimneys, retaining walls, wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and asociated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to the suiding or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum of skylights may project above the highest point of the roof to a maximum project above the highest point of the roof to a maximum of othe roof to a maximum or of the project above the highest point of the roof to a maximum or of							
railings, chimneys, retaining walls, wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof to the sound of the roof to a freen to the highest point of the chonology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum of skylights may project above the highest point of the roof to a maximum of skylights may project above the highest point of the roof to a maximum of ot a maximum of skylights may project above the highest point of the roof to a maximum o							
retaining walls, wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum of skylights may project above the highest point of the roof to a maximum of skylights may project above the highest point of the roof to a maximum of skylights may project above the highest point of the roof to a maximum							
wheelchair ramps, structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or rofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the broof to a maximum of 3.0 metres; and, e. Elements of the roof of the conditing or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum of sumpless the project above the highest point of the roof to a maximum							
structures and elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum of som the project above the highest point of							
elements related to outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the coof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the prof to a maximum of school and skylights may project above the highest point of the prof to a maximum of school and skylights may project above the highest point of the prof to a maximum of school and skylights may project above the highest point of the prof to a maximum of the roof to a maximum of the prof to a							
outdoor patios or terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the prof to a maximum of skylights may project above the highest point of the prof to a maximum of skylights may project above the highest point of the prof to a maximum of skylights may project above the highest point of the prof to a maximum							
terraces, roofing assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
assembly, landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitgation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum of skylights may project above the highest point of the roof to a maximum of skylights may project above the highest point of the roof to a maximum							
landscape features, garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the foof to a maximum							
garbage chutes and associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum of skylights may project above the highest point of the roof to a maximum and skylights may project above the highest point of the roof to a maximum							
associated vents or roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum of skylights may project above the highest point of the roof to a maximum							
roofs may project above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
above the highest point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum of skylights may project above the highest point of the roof to a maximum							
point of the roof to a maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
maximum of 1.5 metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
metres; d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the pighest point of the pighest point of the highest point of the pighest							
d. Ornamental or architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							maximum of 1.5
architectural elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							metres;
elements, intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum						d.	Ornamental or
intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							architectural
intake/exhaust vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							elements,
vents or stacks, fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the							
fences, wind, noise or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
or privacy screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the							,
screens/mitigation measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
measures, chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
chimneys or flues, access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
access roof hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							= -
hatches, trellises, private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
private terrace dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
dividers, cabanas, or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
or outdoor furniture, may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
may project above the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
the highest point of the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
the roof to a maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
maximum of 3.0 metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
metres; and, e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
e. Elements of the roof of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
of the building or structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
structure used for green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum						e.	
green roof technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							
technology, thermal insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							structure used for
insulation, roof ballast, and skylights may project above the highest point of the roof to a maximum							_
ballast, and skylights may project above the highest point of the roof to a maximum							
skylights may project above the highest point of the roof to a maximum							insulation, roof
skylights may project above the highest point of the roof to a maximum							ballast, and
project above the highest point of the roof to a maximum							•
highest point of the roof to a maximum							
roof to a maximum							
	<u> </u>	1	1	1	1		

Schedule 3 to By-law 2024-0021

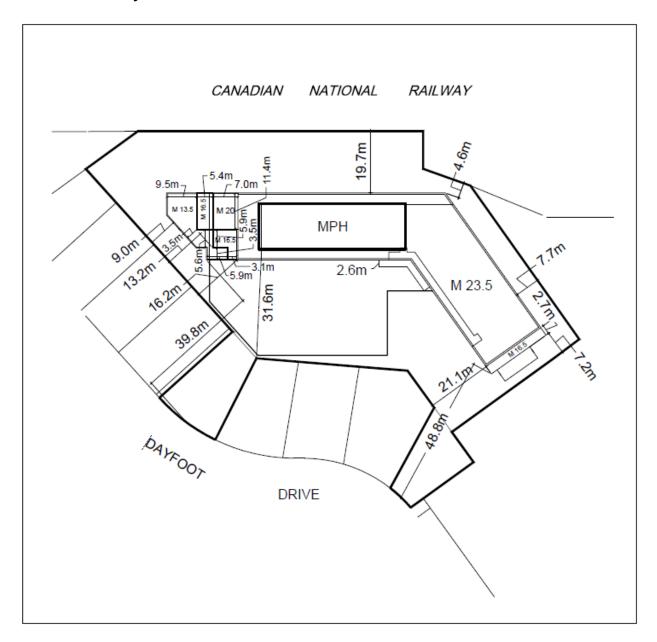

Notes:

- M DENOTES MAXIMUM HEIGHT IN METRES ABOVE GRADE OF 249.50 CANADIAN GEODETIC DATUM
- ALL DIMENSIONS ARE IN METRES. BUILDING SETBACKS ARE PROVIDED A FLEXIBILITY OF +/- 0.1 METRES

Schedule 4 to By-law 2024-0021

14.1 HOLDING ZONES

	Zone Designation	Property/Legal Description	Conditions for Removal	Date Enacted
H30	HDR(117)	12, 22 & 24 Dayfoot Drive (Georgetown) Part of Lot 19, Concession 9 (Esquesing) and Part of Lot 17, Registered Plan 341	 The Holding (H30) provision may be lifted upon: The Town of Halton Hills and Halton Region are satisfied that the subject site has received the necessary servicing allocation (SDE); The remaining analysis with respect to potential site contamination be undertaken to the Region of Halton's satisfaction, following the direction of the Region's Protocol for Reviewing Development Applications with Respect to Contaminated of Potentially Contaminated Sites. The applicant shall prepare and execute a monitoring plan of the proposed infiltration gallery to ensure that it is functioning as intended without adverse effects to the groundwater, to the satisfaction of the Region of Halton and Town of Halton Hills and without negatively impacting the surrounding properties to the satisfaction of the Town of Halton Hills. Appropriate screening through a combination of fencing and landscaping between the subject lands and abutting lots containing single detached dwelling is secured through the Site Plan Control process. 	March 25, 2024